

RPFL SuperDek® Colorbond® XRW/Ultra 0.42BMT/0.48BMT roof cladding. Base Materials: Steel Grade G550. BMT 0.42.Mass 4.3kg/m2 or 0.48BMT 4.9kg/m2. AZ 150 coating for XRW & AZ 200 coating for Ultra. Profiles tested for Cyclonic Conditions.

RPFL Std Colorbond® XRW/Ultra 0.55 BMT Flashing
Base Materials: coating AZ200 Steel Grade G300.
fixed to the roof cladding with SDM Screw.

Top & Bottom Infill Strips/filler block or profiled foam fillers insert between roof cladding and flashing.

Flashguard Soft Edge flashing for metal roof accessories
Weather sealing membrane with elastic characteristics compatible with zincalume, aluminium & galvanised steel roof materials.



Kingspan AIR-CELL INSULINER Self-Supported
3-in-1 Insulation Vapour Barrier and Radiant Barrier
or 430 WF Med. Duty sisalation

Aushmesh 300 Galvanized roof safety mesh
Wire mesh 1.8 X 50m(90m2/roll) Mesh gap
300 X 150mm

RPFL Bridging Channel as per
RPFL purlin catalogue to be installed
as per manufacturers specification

Structure as per engineers details

RPFL Zed & Cee sections are roll formed from
GALVSTEEL, complying with AS1397-2001.
Purlin size as per structural drawings.

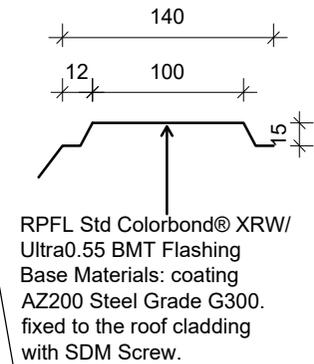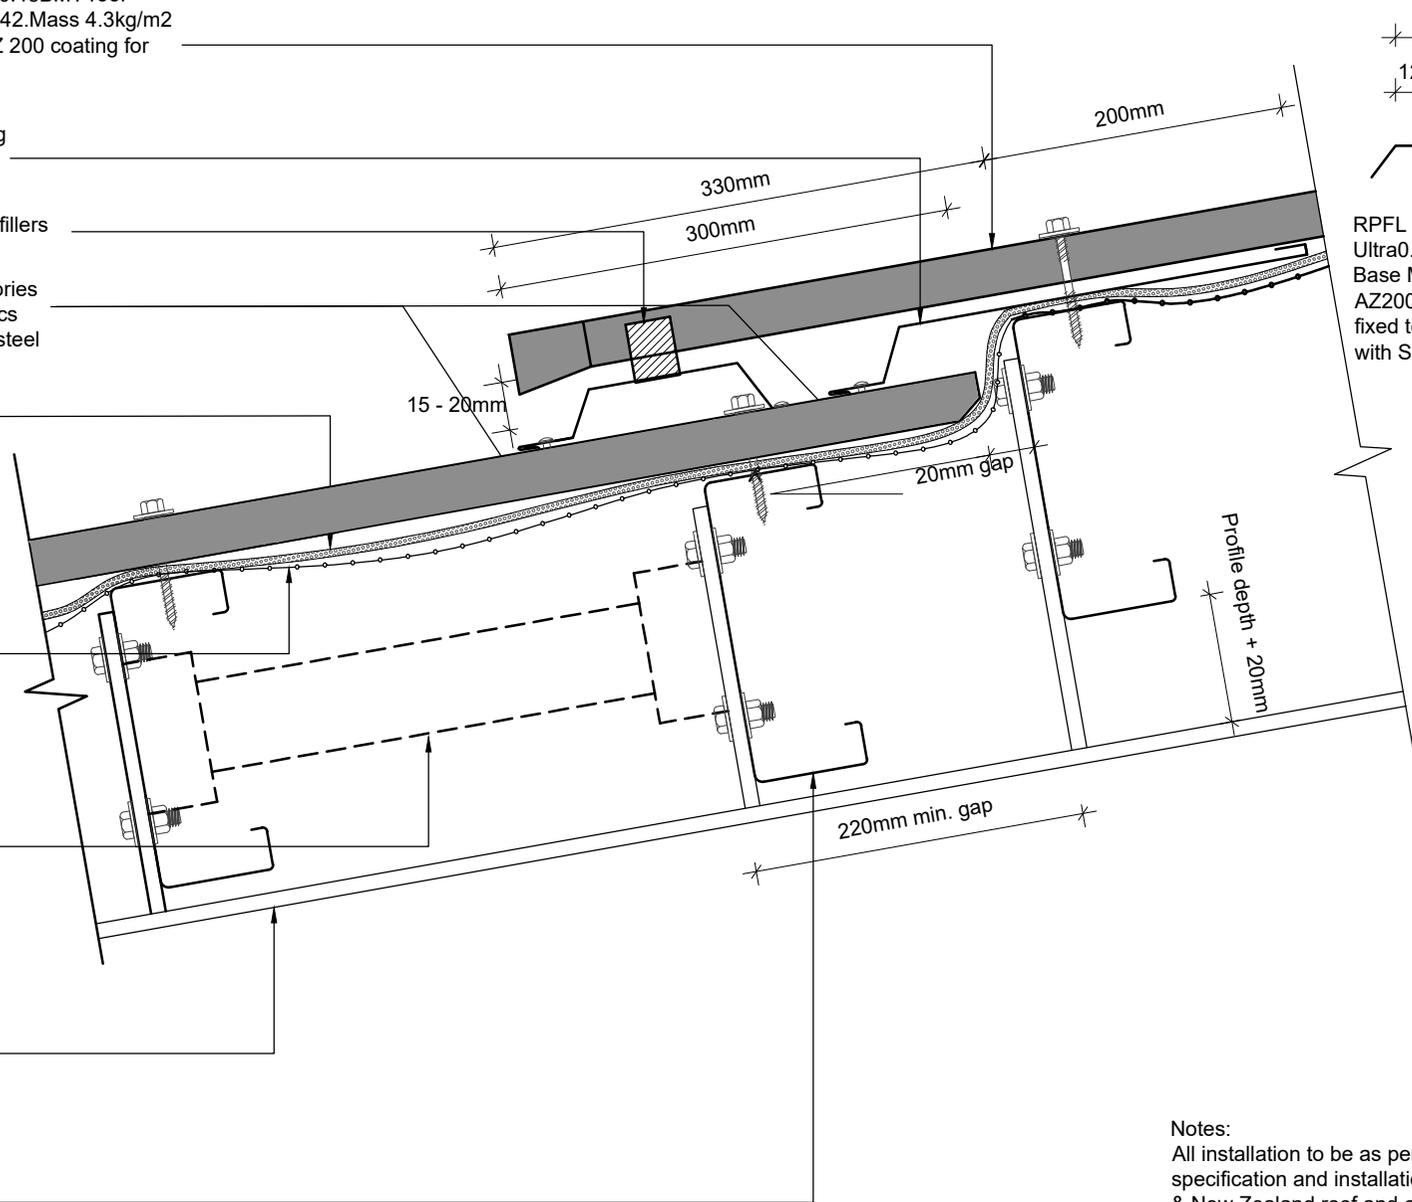

RPFL Std Colorbond® XRW/
Ultra0.55 BMT Flashing
Base Materials: coating
AZ200 Steel Grade G300.
fixed to the roof cladding
with SDM Screw.

Notes:
All installation to be as per New Zealand steel
specification and installation guide. (March 2011)
& New Zealand roof and cladding
CODE OF PRACTICE (Version 2.2/2012)



Roofing & Profiles (Fiji) Pte Ltd
Ph: (679) 6673764 M: 999 9309
Email:info@roofingandprofiles.com.fj

This drawing is the property of Roofing & Profiles (Fiji) Pte Ltd and must not be copied or disclosed to any third party without the written consent of the company.
ALL DIMENSIONS ARE IN mm UNLESS STATED

PROJECT TITLE:
ROOF DETAILS

DRAWING TITLE:
SHOP DRAWINGS

DRAWN: CVB

DATE : 15/12/2020

CHECKED BY:

SCALE: 1:5 @ A4

REVISION No:

APPROVED BY:

SHEET No : SD 1070

REVISION TITLE:

JOB NUMBER: 13 - RAIN