

RPFL 0.55 BMT VALLEY GUTTER

Base Materials: coating AZ200 Steel Grade G300.
fixed to the roof cladding with SDM/TIMBER
Screw / silicon sealant and rivet together .

RPFL SuperDek® Colorbond® XRW/Ultra


0.42BMT/0.48BMT roof cladding.
Base Materials: Steel Grade G550.
BMT 0.42.Mass 4.3kg/m2 or 0.48BMT 4.9kg/m2.
AZ 150 coating for XRW & AZ 200 coating for Ultra.
Profiles tested for Cyclonic Conditions.

Kingspan AIR-CELL INSULINER Self-Supported
3-in-1 Insulation Vapour Barrier and Radiant Barrier
or 430 WF Med. duty sisalation

Aushmesh 300 Galvanized roof safety mesh
Wire mesh 1.8 X 50m(90m2/roll) Mesh gap
300 X 150mm

Structure as per engineers details

Valley Gutter Board support

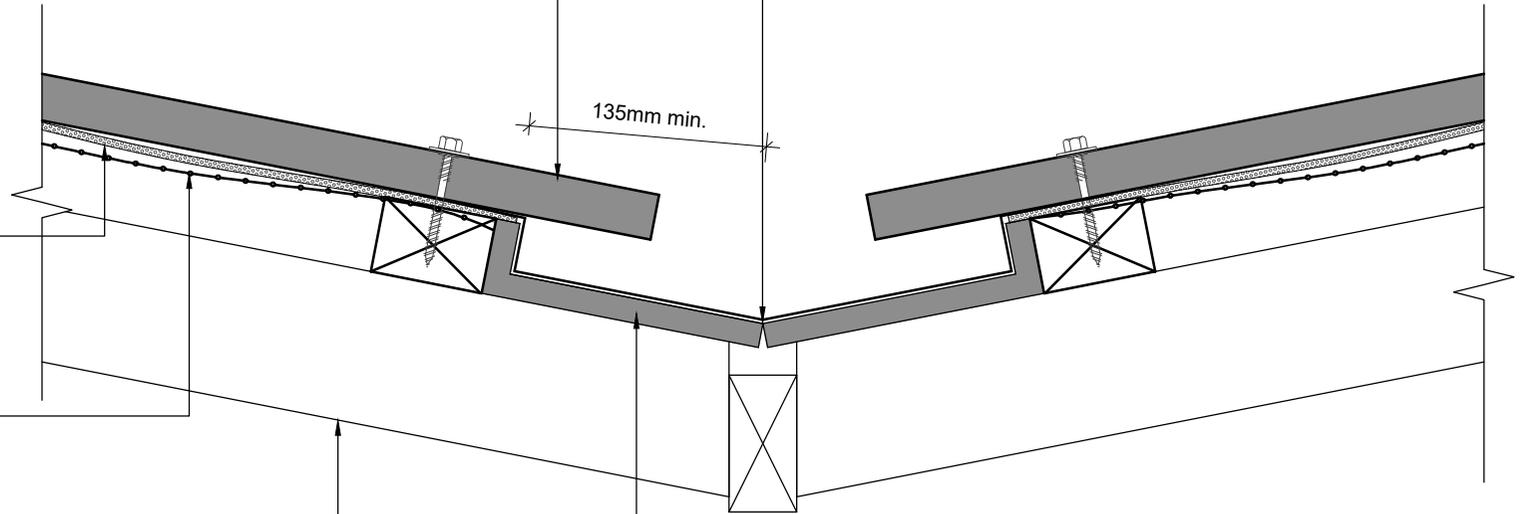

Notes:
All installation to be as per New Zealand steel
specification and installation guide. (March 2011)
& New Zealand roof and cladding
CODE OF PRACTICE (Version 2.2/2012)



Roofing & Profiles (Fiji) Pte Ltd
Ph: (679) 6673764 M: 999 9309
Email:info@roofingandprofiles.com.fj

This drawing is the property of Roofing & Profiles (Fiji) Pte Ltd and must not be copied or disclosed to any third party without the written consent of the company.
ALL DIMENSIONS ARE IN mm UNLESS STATED

PROJECT TITLE:
ROOF DETAILS

DRAWING TITLE:
SHOP DRAWINGS

DRAWN: C.V.B

DATE : 21/11/2020

CHECKED BY:

SCALE: 1:5 @ A4

REVISION No:

APPROVED BY:

SHEET No : SD 1100

REVISION TITLE:

JOB NUMBER: 13 - RAIN